

TOYOTA LC150



FITTING INSTRUCTION


(Front bullbar)

DLC150-R0085 DLC150-R0085-03 DLC150-R0085-BL



Bullbar with homologation "e"

Specification of full assembly:

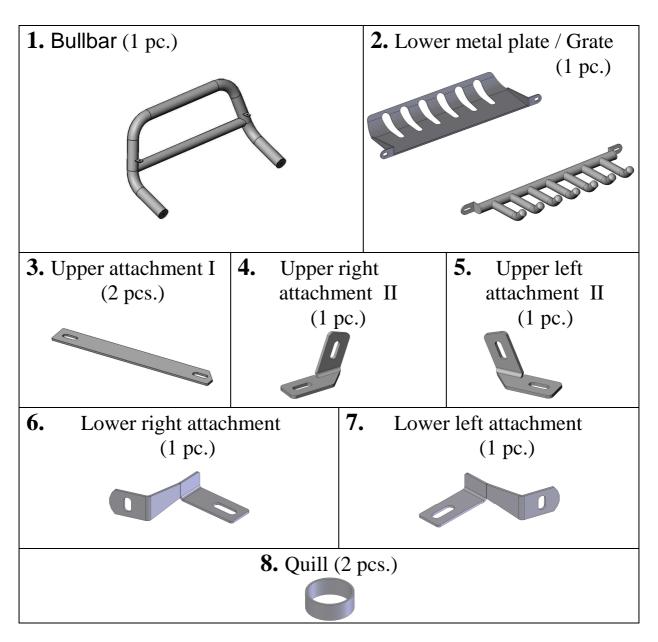

Connecting components:

Screws:

M6x25- 2 pcs.

M8x25-4 pcs.

M12x35- 2 pcs.

M12x50- 2 pcs. (fine thread)

Washers:

Ø6,5-2 pcs. (large washer)


Ø 8,5-8 pcs.


Ø 13-4 pcs. (large washer)

Nuts:

M8-4 pcs.










ATTENTION: Foil remove after fitting!


Bullbar fitting (standard):

DLC150-R0085-03

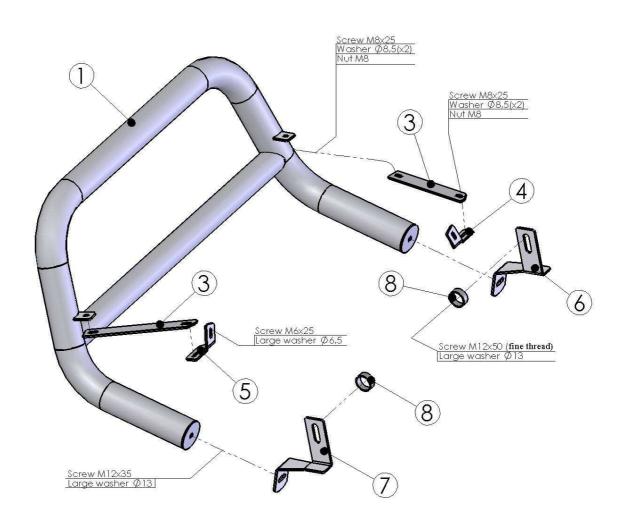


Bullbar fitting (grate):

DLC150-R0085

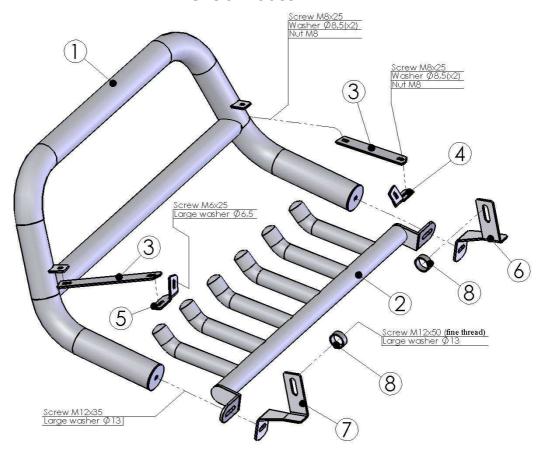

Bullbar fitting (lower metal plate):


DLC150-R0085-BL

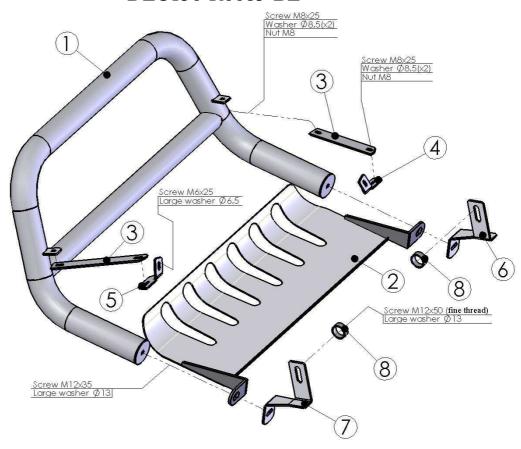


Left, upper attachments:





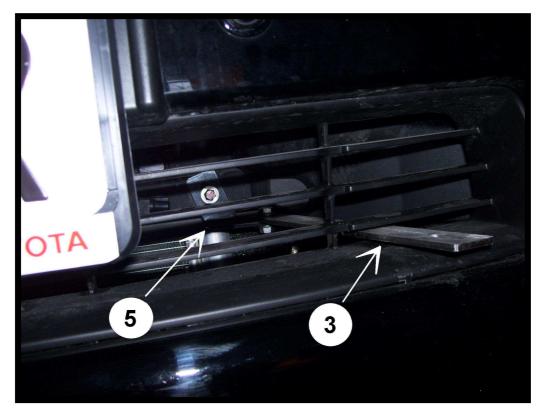


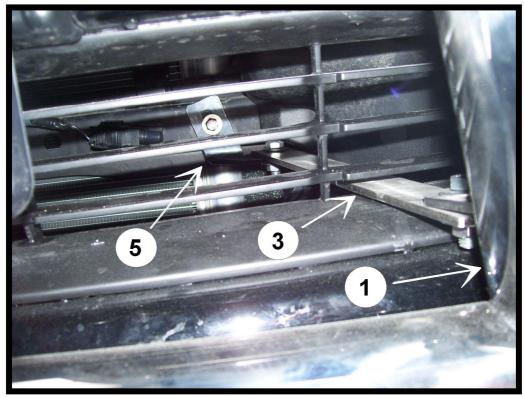


Right, upper attachments:





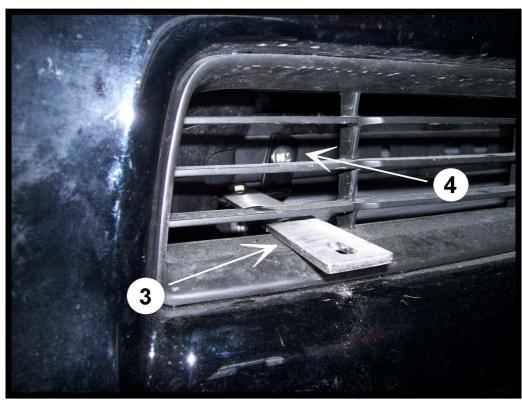

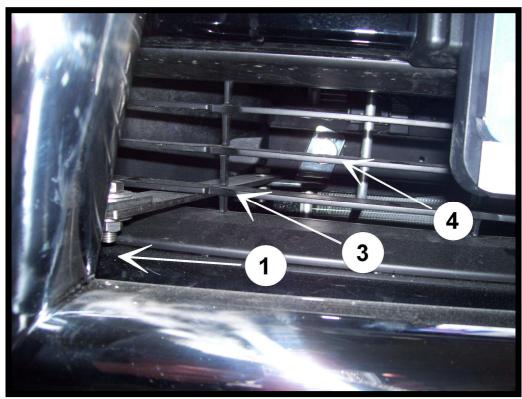

Lower attachments:





