


LINEAR-24 ELITE



Measuring just 40mm in height, the Linear range represents the very best in slimline auxiliary high beam driving lights. By utilising a combination of highly efficient 3W LEDs and vacuum-metallised wide optics, to deliver a perfectly tuned beam pattern for everyday road use, the 24 Elite boasts 18,000 raw lumens, with 1 lux reaching just under 600m with a 64 degrees spread of light. Dual-output functionality allows for the UNECE reference number to be reduced, in markets requiring a low E-mark reference number, made possible through addition of the Linear E-Mark Cap (sold separately).



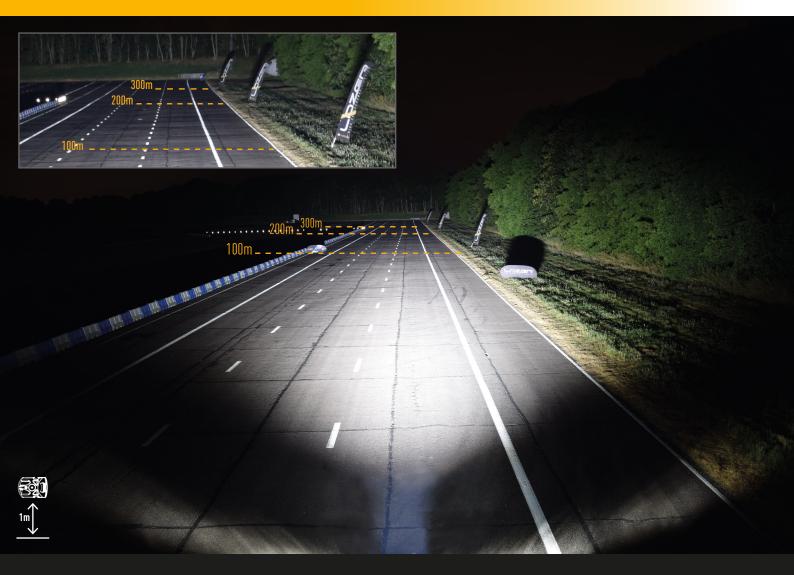



LINEAR-24 ELITE

- Combination of highly efficient 3W 'premium bin' LEDs
- Vacuum-metallised optics deliver wide spread of light
- Flexible mounting options anti-theft mounting brackets included
- Dual-output functionality achieves lower E-mark reference (requires E-mark Cap sold separately)
- Sleek, low profile design facilitates installation
- Electronic thermal management
- Designed & manufactured in the UK


MOUNTING OPTIONS






(Anti-theft fasteners included)

(Centre Mount kit sold seperately)







LAZER LAMPS LTD, Units 1+2, Harlow Mill Business Centre, Riverway, Harlow, Essex. CM20 2FD. UK Tel: +44(0)1992 677374 | Email: sales@lazerlamps.com | Web: www.lazerlamps.com

E-MARK REF (W/O EMARK CAP WITH EMARK CAP)	2x30 2x17.5
VOLTAGE RANGE	10V - 32V
RAW LUMENS (W/O EMARK CAP WITH EMARK CAP)	18,000 7,740
BEAM PATTERN	Wide
BEAM DISTANCE (0.25LX) (W/O EMARK CAP WITH EMARK CAP)	1126m 712
# HIGH POWER LEDS	24
POWER CONSUMPTION (W/O EMARK CAP WITH EMARK CAP)	188W 38W
CURRENT DRAW [†] (W/O EMARK CAP WITH EMARK CAP)	14.4A 2.6A
LED LIFE	50,000 Hrs*
WEIGHT	2000g









* LED Manufacturers Specifications †At 14.4 Volts

Horizontal: 64° / Vertical: 15° (2% of peak)







LINEAR-24 ELITE - LOWER E-MARK REFERENCE

